

Conveyor belt



Standard version

- Hydraulic driven from tractor
- Belt width 65cm
- Stepless adjustable belt speed
- Adjustable drawbar
- Manual swivelling conveyor
- Straight or gooseneck frame
- Manual height adjustment

Options

- Electric drive 2-speed
- Electro-hydraulic drive
- Hydraulic height adjustment
- Hydraulic swivelling conveyor
- Extra set hydraulic hoses 10m
- Fall breaker





Fall breaker



Hydraulic swiveling conveyor



Electro hydraulic drive
+ hydraulic height adjustment

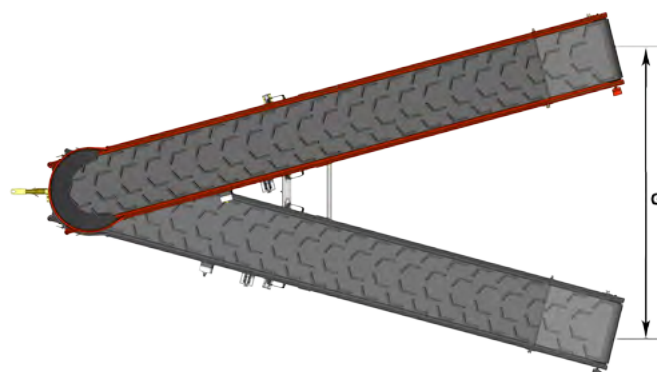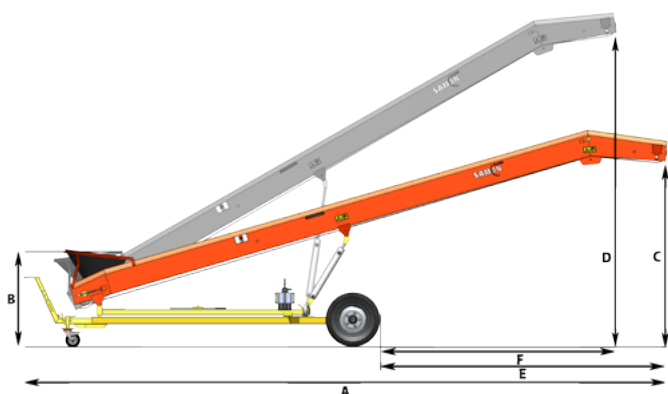

Belt length (m)	4.00	3.50	4.50	5.50	6.50
Version	Straight	Gooseneck	Gooseneck	Gooseneck	Gooseneck
Height adjustment*	Mechanical	Mechanical	Mechanical	Hydraulic	Hydraulic
Hydraulic motor	125 cc	125 cc	125 cc	125 cc	125 cc
Electric motor	230/400V 2,2 kW	230/400V-2,2 kW	230/400V-2,2 kW	230/400V-2,2 kW	230/400V-2,2 kW
A Total length (m)	4.60	4.00	5.10	6.00	6.85
B Input height (m)	0.95	0.95	0.95	0.95	0.95
C Min. height (m)	1.85	1.60	1.50	1.45	1.60
D Max. height (m)	2.50	2.10	2.55	2.85	3.00
E Max. overhang (m)	1.90	1.60	2.45	2.65	3.05
F Min. overhang (m)	1.52	1.25	2.00	2.20	2.55
G Swivel range (m)	1.80	2.10	2.00	2.20	2.55
Belt profile	V shape 30mm	Chevron 32mm	Chevron 32mm	Chevron 32mm	Chevron 32mm
Weight (kg) **	340-425	395-480	465-550	520-580	615-700

* Standard version ** Depending on options

Ellens Landbouwtechniek BV Ploegstraat 4, 8308 AA Nagele, The Netherlands

T +31 527 652 500 **F** +31 527 652 916 **info@samon.nl** **www.samon.nl**